

# LYTPremier Series A

High and Low-Bay  
LED Lighting



The LYTPremier Series is designed for factories, warehouses, retail, architectural lighting and much more! The unique optical design focuses light to where it is needed and provides uplight to eliminate “cave effect”.

## PRODUCT FEATURES

- Uplight eliminates “cave-effect”
- Rugged aluminum housing
- Multiple mounting options
- IP66 rated for wet environments
- Replaceable LEDs and drivers

## BENEFITS OF LED BAY LIGHTING




- Instant On - No Warm-Up Period
- Reduced Energy Consumption
- Maintenance Free
- Long Life Expectancy
- Durability
- Superior Light Quality
- High Efficiency





# LYTPremier Series A

## High and Low-Bay LED Lighting



### Product Specifications

- 
**Electrical:**  
 Input Voltage: 110 to 277 VAC  
 Input Frequency: 60 Hertz
- 
**Photometric:**  
 Lumen Range: 6,848 to 26,520  
 Wattage Range: 69 to 227 Watts  
 Color Temperature (CCT): 5,000K
- 
**Rated Life:**  
 50,000 hours  
 Replaceable drivers

- 
**Mounting:**  
 Suspended
- 
**Housing:** IP66 rated for wet environments  
 White powder-coat standard
- 
**Certifications:**  
 UL, DLC
- 
**Limited Warranty:**  
 5 year


### Available LYTPremier High and Low-Bay LED Lighting Models

MODEL #	APPLICATION TYPE	TYP. MOUNTING HEIGHTS	LUMENS	WATTS @ 277VAC	LUMENS /WATT	CRI	BEAM ANGLE	WEIGHT	LENGTH (X)	HEIGHT (Y)
LYTP-A068	Low-Bay	10' to 18'	6,848	69	99	73	80°	31 lbs	20"	7.52"
LYTP-A123	Low-Bay	12' to 20'	12,312	120	103	72	80°	31 lbs	20"	7.52"
LYTP-A157	Low/High-Bay	16' to 24'	15,790	137	115	73	80°	31 lbs	20"	7.52"
LYTP-A207	Low/High-Bay	22' to 30'	20,700	179	115	75	80°	31 lbs	20"	7.52"
LYTP-A265	High-Bay	26' to 34'	26,520	227	117	76	80°	31 lbs	20"	7.52"

Aluminum heavy duty housing; Chip on board with premium driver

This Re-Verber-LYT LED lighting fixture must be installed correctly. The contractor, owner, installer, purchaser, and user is responsible for installing, maintaining, and operating the light fixture in compliance with all state and local laws, ordinances, regulations, and the American National Standards Institute (ANSI) Safety Code.

#### Dimensions

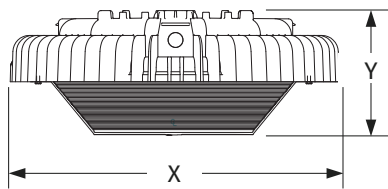

The validity of the product warranty is subject to the correct storage, installation, operation, and maintenance of this product. Failing to comply with proper storage, installation, operation, and maintenance routines will make the warranty invalid. Specifications subject to change without notice.



21400 Hoover Road, Warren, Michigan 48089 USA  
 +1.586.756.0950 | sales@drp-co.com

[www.REVERBERLYT.com](http://www.REVERBERLYT.com)



Form No. LBBP\_0M-0917 (DRP)

